

# NEOLITH<sup>®</sup>

Tile Program




Where Creative Inspiration Begins

**EVOLV**

SURFACES

# FORMATS, THICKNESSES & FINISHES

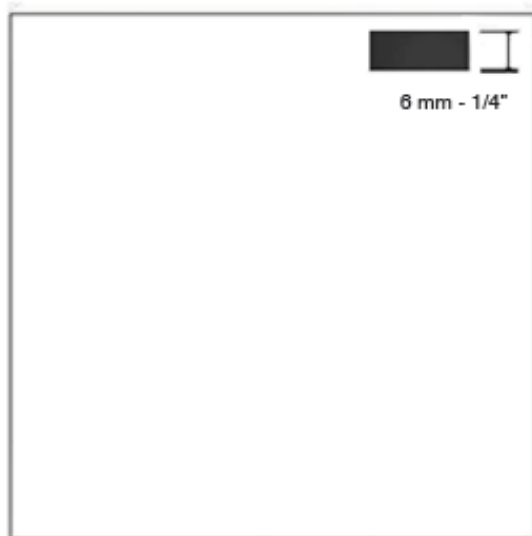

6 mm - 1/4"

1500x1500 mm  
59"x59"




6 mm - 1/4"

1500x750 mm  
59"x29.5"



6 mm - 1/4"

1500x500 mm  
59"x19.66"



6 mm - 1/4"

750x750 mm  
29.5"x29.5"



## SATIN

Matte finish highly resistant to stains, scratching and UV rays. Ideal for commercial applications.



## SILK

Matte finish with a thin layer or glaze that provides a subtle shine that is very easy to clean.



## RIVERWASHED

Finish with a rough texture.

### DCOF Results

Satin Finish	Silk Finish	Riverwashed Finish
0.43	0.42	0.53

# TECHNICAL FEATURES



**WATERPROOF**

Waterproof and resistant to liquids, with an absorption level of almost zero.



**RESISTANT TO SCRATCHES**

Its hard surface makes it resistant to scratches and abrasion.



**RESISTANT TO HIGH TEMPERATURES**

It does not burn in contact with fire nor does it emit smoke or toxic substances when subjected to high temperatures.



**EASY TO CLEAN**

Resistant to any kind of chemical cleaning agent such as bleach or ammonia.



**HYGIENIC**

It does not give off any harmful substances and is totally suitable for contact with food. NSF Certified.

# MODELS



ARCTIC WHITE SILK



CALACATTA SILK



STRATA ARGENTUM RIVERWASHED



PIETRA DI LUNA SILK



PIETRA DI OSSID SILK



CONCRETE TAUPE SILK



BETON SILK



CEMENT SATIN



ZAHA STONE SILK



PIETRA DI PIOMBO SILK



BASALT GREY SILK



ASPEN GREY SILK



BARRO SATIN



IRON COPPER SATIN



IRON MOSS SATIN



IRON CORTEN SATIN



IRON GREY SATIN



BASALT BLACK SILK



RESISTANT TO UV RAYS



100% NATURAL



RECYCLABLE



LIGHTWEIGHT



RESISTANT TO BENDING


Being 100% natural, its colors do not fade away when being exposed to sunlight or other extreme weather conditions.

It does not give off any substances that are harmful to the environment.

Up to 52% of recycled content in every slab. Slabs are 100% recyclable.

Only 15 kg/m<sup>2</sup> (3.07 lb/sq ft) in a 6 mm slab.

It has a high shear rate, making it resistant to heavy loads and pressure.

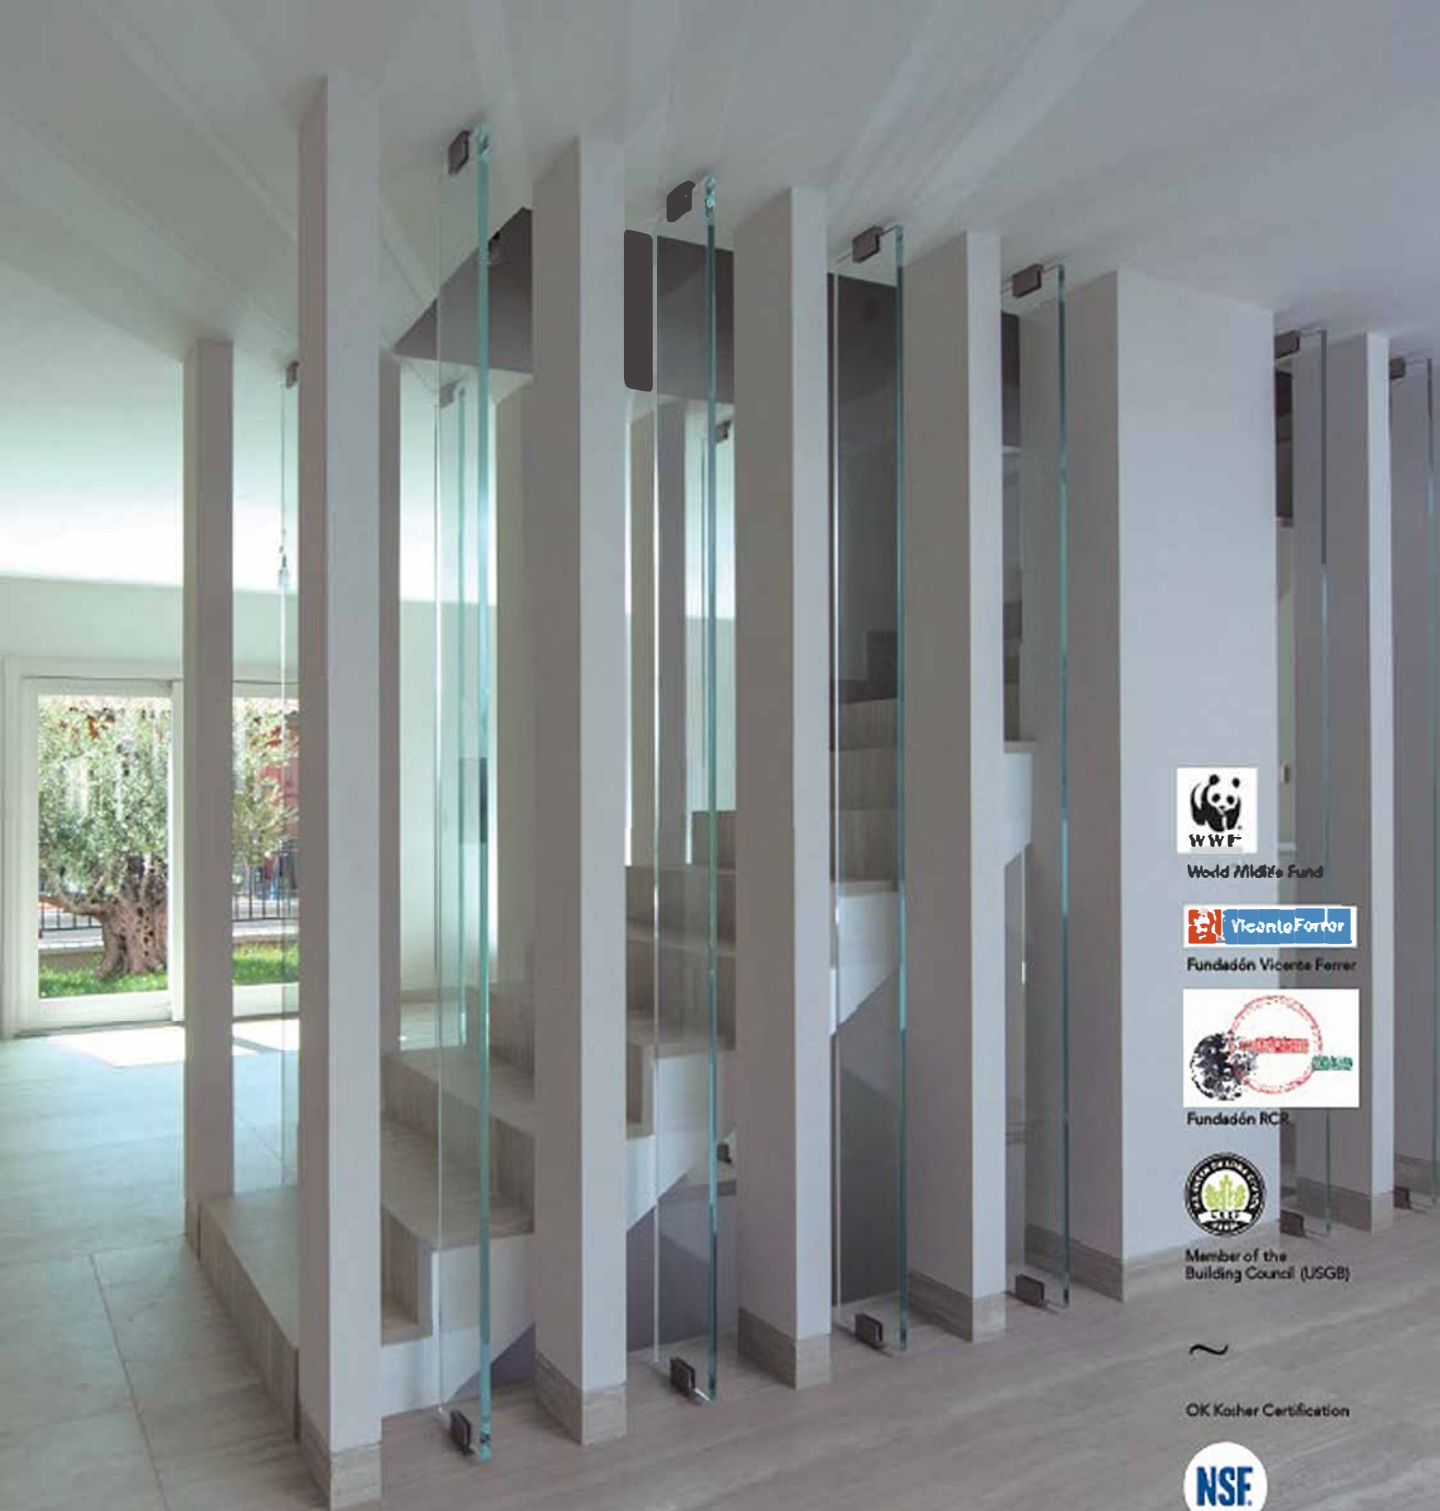

World Wildlife Fund



Fundación Vicente Ferrer



Fundación RCR



Member of the Building Council (USGB)



OK Kother Certification



NSF Certifies that Neol totally suitable for con with food.



European Commission Certification



Designed and produced by TheSize

Where Creative Inspiration Begins

# EVOLV

SURFACES

1313 Armstrong Ave, San Francisco, CA  
t. 415.767.4600 info@evolvsurfaces.com

22261 West Valley Highway, Kent, WA  
t. 253.277.4948 karyl@evolvsurfaces.com

3475 W. Post Road, Suite 125, Las Vegas, NV  
t. 702.527.7526 beau@evolvsurfaces.com